




Features of Lithium Iron Phosphate

- **Longer Cycle Life:** Offers up to 20 times longer cycle life and five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership.
- **Lighter Weight:** About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.
- **Higher Power:** Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.
- **Wider Temperature Range:** -20 C~60 C.
- **Superior Safety:** Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.
- **Increased Flexibility:** Modular design enables deployment with several batteries both in series and in parallel.

SGS

- MSDS
- UN38.3
- IEC
- CB
- FCC


Physical Dimension

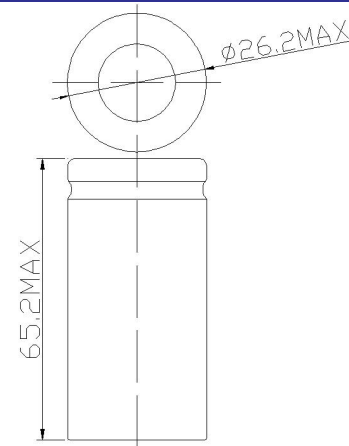


Specification

Electrical Characteristics	Nominal Voltage	3.2V
	Nominal Capacity	3800mAh
	Energy	12.16Wh
	Internal Resistance	$\leq 60\text{m}\Omega$
	Cycle Life	>2000 cycles @0.2C 80%DOD
	Months Self Discharge	<3%
	Efficiency of Charge	100% @0.5C
	Efficiency of Discharge	96~99% @1C
Standard Charge	Charge Voltage	3.65V
	Charge Mode	0.2C to 3.65V, then 3.65V, charge current to 0.02C ₅ A (CC/CV)
	Charger Current	760mA
	Max. Charge Current	1.0C ₅ A
	Charge Cut-off Voltage	$3.65 \pm 0.03\text{V}$
Standard Discharge	Continuous Current	760mA
	Max. Discharge Current	3.0C ₅ A
	Discharge Cut-off Voltage	2.5V
Environmental	Charge Temperature	0°C to 45°C @60±25% Relative Humidity
	Discharge Temperature	-20°C to 60°C @60±25% Relative Humidity
	Storage Temperature	0°C to 40°C @60±25% Relative Humidity
	Water Dust Resistance	/
Mechanical	Dimensions (mm.)	27.0*66.5mm MAX
	Weight (g.)	Approx:92g


Different Rate Discharge Curve

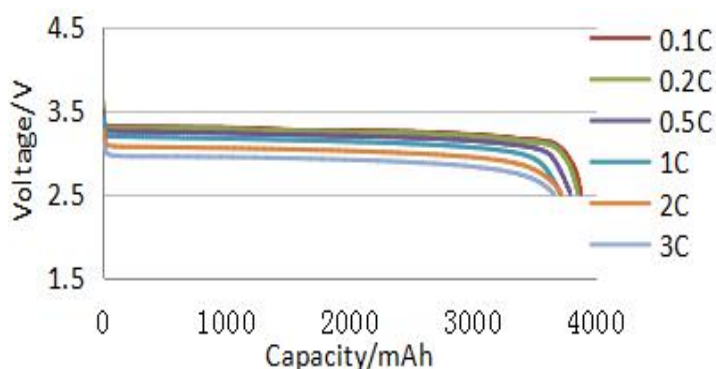


Different Temperature Discharge Curve

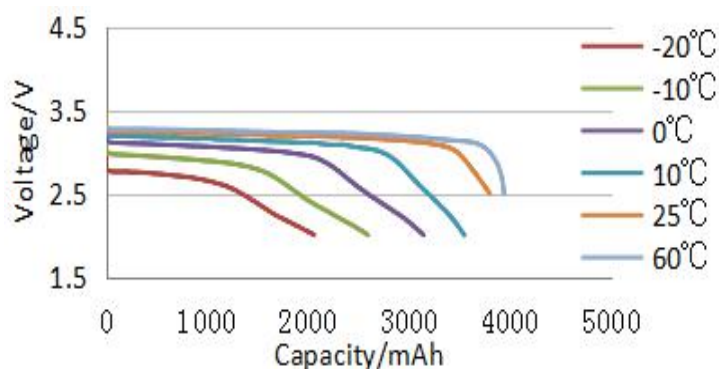

0.5C Charge Curve

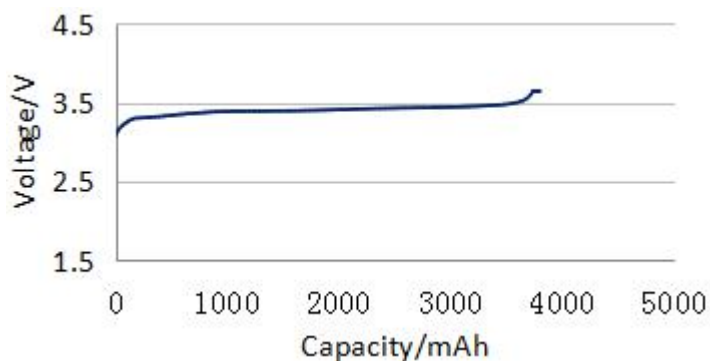

Cycle Life Curve

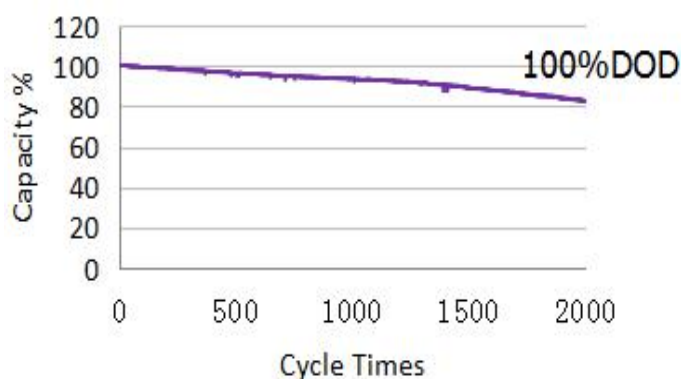

Melasta Battery Co.,Ltd

Sales Office:Hesheng Industrial Zone, Dalang,
 BaoAn District,Shenzhen,518109,China .
 Tel:+86-755-83693563 Http://www.melasta.com
 Fax:+86-755-28120114 E-mail:sales@melasta.com

Factory Address: Zhongxingbao Industrial Zone,Qinghuan Road ,
 Qingxi District,Dongguan,518109,China .